

TECHNICAL DETAILS

| | |
|---|--|
| WEIGHT/ROLL 80 lbs. 36.3 kg | WEIGHT/SQUARE 40 lbs. 18.1 kg |
| WIDTH 39 ³ / ₈ " 1 m | LENGTH 66' 20.1 m |
| THICKNESS 53 mils nominal | COVERAGE 2 square |
| PERM RATING < 0.1 U.S. perms | ROLLS/PALLET 30 |

LAY LINES

2", 4", 12¹/₂", 18³/₄"
51 mm, 102 mm, 318 mm, 476 mm


TEST COMPLIANCE

| | |
|--|---------------------------------|
| ASTM D4601 Type II | ASTM D4869 |
| ASTM D226 | ASTM D6757 Type II |
| ICC APPROVAL ESR-1561 | FBC APPROVAL #14807 |
|  | |

FEATURES & BENEFITS

- Flexor™ SBS Polymer Modified Asphalt
- Water-resistant Underlayment
- Effective Dry-in Sheet
- UL Class A Fire Rated When Installed with a Fire Rated Roof Covering

FLEXOR™ SBS POLYMER MODIFIED FIBERGLASS UNDERLAYMENT

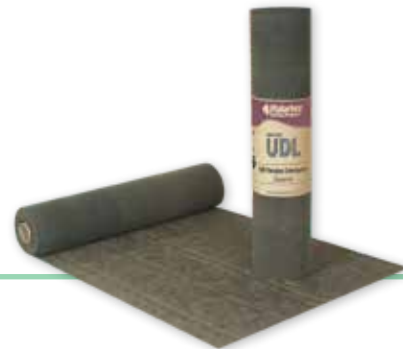

PRODUCT USE

Right Start™ UDL is a Flexor™ SBS polymer modified asphalt membrane suitable for use as a water-resistant underlayment or dry-in sheet for steep slope roofing applications to include asphalt shingles, roof tile, and wood shakes and shingles. Right Start™ UDL is approved for use under fire-rated, code-compliant roof coverings. Please consult Malarkey's Technical Services Department for approval of roof systems.

COMPOSITION & MATERIALS

Right Start™ UDL is manufactured on a durable fiberglass mat, impregnated and coated on both sides with Flexor™ SBS polymer modified asphalt, and surfaced with a mineral release material.

APPLICATION

Right Start™ UDL shall be applied as specified. It is not intended as a permanently-exposed roofing surface but can be left uncovered for up to 30 days if necessary before the primary roof covering is installed. See Malarkey Specification Manual for specific installation instructions, and/or contact our Technical Services Department for details.

PRECAUTION

Right Start™ UDL should be stored on end prior to installation to prevent rolls from flattening. Malarkey recommends allowing Right Start™ UDL to warm up and relax prior to application in colder weather. Roof decks should be sound, dry, smooth, meet necessary local requirements, and provide positive drainage. Certain tiles with minimal contact to the surface of Right Start™ UDL may be prone to sliding.

WARRANTY

Right Start™ UDL is eligible for expanded warranty coverages relative to its use as a single roofing accessory or in combination with others in a complete Malarkey roofing system. Installed separately, it carries a 10-year product warranty against manufacturing defects. Contact your roofing contractor, local distribution center, or Malarkey for full details. See below for TECHNICAL ASSISTANCE contact information.

Right Start™ UDL and other Malarkey products are available throughout North America and Pacific Rim countries.

Visit WWW.MALARKEYROOFING.COM for additional product information and availability.

Note: Malarkey Roofing Products® (Malarkey) inventory SKU number for this product: (501 UDL) Right Start™

| PHYSICAL PROPERTIES | ASTM D4601 TYPE II | TYPICAL RESULTS |
|---------------------|--------------------|-----------------|
| Maximum load, CM | 22 lbf/in, minimum | Pass |
| Maximum load, MD | 22 lbf/in, minimum | Pass |
| Pliability | No failures | Pass |

TECHNICAL ASSISTANCE:

Malarkey has technical services assistance available. Contact Malarkey for details: Call weekdays 7:00 am to 5:00 pm PST, at 800.545.1191 or 503.283.1191. technicalinquiries@malarkeyroofing.com

CORPORATE OFFICE:

3131 N. Columbia Blvd. Telephone: 503.283.1191
Portland, OR 97217-7472 or 800.545.1191
P.O. Box 17217 Fax: 503.289.7644
Portland, OR 97217-0217